



Department for

Infrastructure

An Roinn

Bonneagair

www.infrastructure-ni.gov.uk



**DfI Roads
NORTHERN DIVISION
Annual Report
to
Causeway Coast and Glens
Borough Council
Spring 2021**

Contents

	Page No.
Foreword	3
Northern Division Map	4
Senior Management Structure	5
2020/2021 Expenditure Profile	6
Section 1 - Strategic Road Improvements	7
1.1 A6 Dungiven to Drumahoe Dualling	8
1.2 A6 Randalstown to Castledawson Dualling	9
Section 2 - Network Maintenance	10 - 44
Winter Service	45
Section 3 - Network Development	46
3.1 Minor Improvements	47 - 50
3.2 Traffic	51 - 54
3.3 Street Lighting	55 - 59
Section 4 - Network Planning and Highway Structures	60
4.1 Development Control	61
4.2 Maintenance of Structures	62 - 65

Foreword

The Mayor, Aldermen and Councillors Causeway Coast & Glens Borough Council

I have pleasure in submitting the 2021-2022 Annual Report on the work of DfI Roads across the Causeway Coast and Glens Borough Council Area.

This report deals with works completed across the Council area during the year 2020-2021 and sets out our initial proposals for schemes to be undertaken in the year 2021-2022. An update on the two Strategic Road Improvement schemes that are being taken forward in the Division is also provided.

2020/21 was an unprecedented year owing to the impact of the COVID-19 pandemic and thankfully our contractors have developed new working practices to enable much needed road maintenance and improvement work to proceed. The impact of COVID has been mitigated as far as possible and productivity has been such that most of our 20/21 programme was successfully delivered despite the absence of work over the first part of the year.

Since 2013 the Department for Infrastructure's baseline Resource budget has been insufficient to meet its needs and we have relied on in year funding to deliver core services including public transport and winter gritting. This continued to be the case for 2020-21.

I am pleased to advise that this year's initial capital allocation has been increased and this has allowed an increase in funding for structural maintenance across Northern Division in 2021-22 including within the 'road recovery fund'. This level of investment is very welcome as it moves towards the figures required annually to maintain the road network in a reasonable condition. Our main focus now is to seek to ensure that we have sufficient design and contracting resource available to deliver on this significant increase in capital funding.

Capital funding also influences our Local Transport and Safety Measures programmes which includes Safer Routes to Schools and funding this year will allow the introduction of a further tranche of part time speed limits at schools across the Council Area. In 2021/22 significant additional funding is also being made available for Blue Green and Active Travel programmes, details of which are also included within this report.

The opening allocation in 2021-22 for routine maintenance is also similar to that for 2020-2021 and I am pleased to report that, despite wider pressures, the Minister has allocated sufficient funding to allow a full street lighting repair service for the entire year and continuation of a limited service which will allow defects greater than 50mm depth to be repaired across all roads. On high traffic roads, defects greater than 20mm will also be repaired. DfI Roads will aim to cut all roadside verges and sightline grass at least twice in the period April-October with sightlines at bends and junctions being cut more frequently as required to ensure public safety is not compromised.

I would encourage Councillors to avail of the online fault reporting system on NI Direct. My operational staff are of course also available to assist with queries.

I hope that you find this report informative. We value constructive comments on all of our activities and I, along with Gary Quinn and Section Engineer James Morrison look forward to meeting the Council.

COLIN HUTCHINSON
Divisional Roads Manager

Northern Division

Northern Division is one of four Client Divisions within DfI Roads. It spans the local Council areas of Causeway Coast & Glens, Mid & East Antrim and Antrim & Newtownabbey (see map below).



Northern Division is responsible for approximately 5,853km (3,635 miles) of public road and 2,636km of footway, together with 1,328 bridges and 10 park and ride/share sites. We carry out functions under the headings:-

- Strategic Road Improvements
- Network Maintenance
- Network Development
- Network Planning
- Schemes greater than £1.5 million on strategic roads
- Maintenance of Roads and Structures
- Street Lighting, Traffic and Transportation and Road Improvement
- Development Control and input to Local Development Plans

Divisional Headquarters
County Hall
Castlerock Road
Coleraine
Co Londonderry
BT51 3HS

Tel: 0300 200 7899
E-mail: dfiroads.northern@infrastructure-ni.gov.uk
Emergency Tel No: 0300 200 7891
Website: <https://www.nidirect.gov.uk/contacts/contacts-az/dfi-roads-northern-division>

Northern Division - Senior Management Structure



Colin Hutchinson
Divisional Roads Manager



Dawson Wray
James Middleton
Strategic Road Improvements Managers

Major works schemes; Management of consultants;
Large minor works schemes.



Gary Quinn
Network Maintenance Manager

Road maintenance; Section Offices; Inspections, Road maintenance standards, Utility street works; Winter service; Structural maintenance planning and programming; Estimates and allocations for all operation & maintenance functional activities.



Alan Keys
Network Development Manager


Minor improvements; Traffic management; Street lighting capital & maintenance; Estimates and allocations for local transport & safety measures; On-street parking and Park and Ride/Share parking.



Cathal Brown
Network Planning Manager

Development Control; Private Streets; Area Plans; Forward Planning; Highway structures.

Causeway Coast & Glens Council Area 2020/21 Expenditure Profile

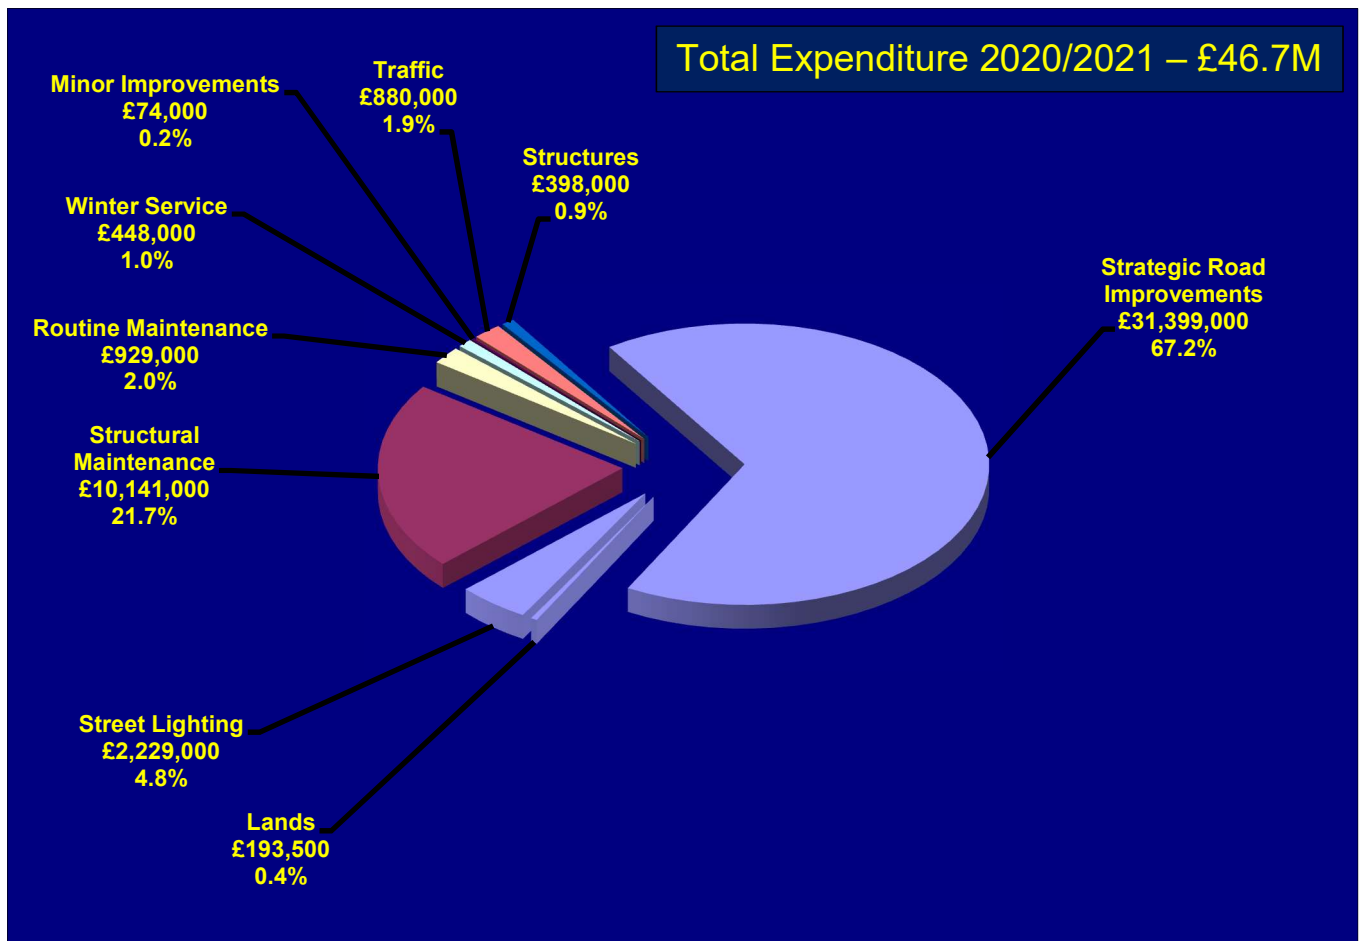

Structural Maintenance - Resurfacing, Surface Dressing, Patching and Drainage

Routine Maintenance - Grass cutting, Environmental Work, Gully Emptying, Embankment/Verge Maintenance, Fencing and Car Parks

Winter Service - Gritting, Snow Clearance

Street Lighting - Lighting Provision, Maintenance and Energy

Traffic - Collision Remedial, Traffic Management, Traffic Calming and Transportation

Network Development - Minor Improvements and Safety Barriers Structures - Bridge Maintenance and Bridge Strengthening

Strategic Road Improvements - Major Improvements to Key Transport Corridors

Lands - Acquisition of land for road schemes

SECTION 1

STRATEGIC ROAD IMPROVEMENTS

Senior Staff



Billy Miller
Strategic Road Improvements
County Hall
Castlerock Road
Coleraine
BT51 3HS

E-mail: Billy.Miller@infrastructure-ni.gov.uk



Philip McKeown
Strategic Road Improvements
County Hall
Castlerock Road
Coleraine
BT51 3HS

E-mail: Philip.McKeown@infrastructure-ni.gov.uk



Colin Cochrane
Strategic Road Improvements
County Hall
Castlerock Road
Coleraine
BT51 3HS

E-mail: Colin.Cochrane@infrastructure-ni.gov.uk



Gareth Kerr
Strategic Road Improvements
County Hall
Castlerock Road
Coleraine
BT51 3HS

E-mail: Gareth.Kerr@infrastructure-ni.gov.uk

1.1 A6 Dungiven to Drumahoe Dualling

(Being dealt with by James Middleton, supported by Billy Miller, Colin Cochrane and Gareth Kerr)

This Executive Flagship project represents an investment in the region of £220 million and will upgrade 25.5km of the A6 between Drumahoe and Dungiven to dual carriageway standard, including a bypass of Dungiven.

Construction of this dualling scheme is progressing well with approximately 95% of the earthworks completed to date. Ten structures are substantially complete and works are ongoing on a further eleven. Recently the steel beams on the Ardmore Road Bridge were lifted into place over the River Faughan, beams were also placed on the new structure at Liberty Glen and the existing Burntollet Bridge was demolished which will enable the construction of the westbound section of the new Burntollet Bridge that crosses the River Ness.

Significant progress has been made with the installation of culverts, mainline drainage, access tracks, utility diversions and the pavement construction along the new mainline carriageway.

The new Park and Ride at Drumahoe also became operational on 5th July 2021.

COVID-19 initially disrupted or stopped many activities due to difficulties in the supply chain, social distancing requirements and staff absences. Although the situation is now much improved, COVID-19 continues to have an impact, however the scheme is expected to be complete in 2022, largely as planned.

Further information on the works and traffic management is available on the scheme website at: <https://a6d2d.com/>



Beams being lifted in place for the Ardmore Road bridge.



Construction of dual carriageway at Ballyhanedin.

1.2 A6 Randalstown to Castledawson Dualling

(Being dealt with by Dawson Wray, supported by Philip McKeown)

This scheme provides a continuous dual carriageway from the western end of the M22, near Randalstown, to the Castledawson Roundabout, reducing journey times and improving road safety. The £189m scheme is 15km (9 miles) long in two main sections each side of the Toome Bypass, and commenced in June 2017.

The opening of the first phase between M22 at Randalstown and Toome in August 2019 was a significant milestone for the scheme, and welcome news for the road users in the 22,000 vehicles along the route who are benefitting from safer, more reliable journeys.

During the past 12 months good construction progress was made within the sensitive swan area between Toome Bypass and Deerpark Road. Along this section all major earthworks and drainage were completed in line with Environmental commitments by the end of September 2020, permitting other minor construction activities to continue through the winter period.

With temporary traffic management (TTM) measures in place (one lane running in each direction, speed limit restriction and a short stretch of contraflow on east bound lane of the Toome Bypass) a further 5km (3 miles) of new dual carriageway between the Toome Bypass, and the area called the Broagh opened to traffic on the 23 November 2020.

Over the winter months works continued on the mainline with the main construction activities concentrated on the west bound carriageway tie-in to the existing Toome Bypass, other local network connections at Hillhead junction and B18 Creagh and subsequent removal of the contraflow arrangement on the Toome Bypass.



Aerial view looking west – Toome Bypass tie-in



Aerial view looking west – Deerpark Road Junction

The Infrastructure Minister Nichola Mallon visited the site on Friday 28 May 2021 to speak to those involved in the delivery of the scheme. This was just in advance of the removal of Temporary Traffic Management and 40mph speed restriction, allowing the entire dual carriageway to open on Monday 31 May 2021. A great achievement for everyone involved in the delivery of such a major infrastructure project.

SECTION 2

NETWORK MAINTENANCE

Network Maintenance Manager: Gary Quinn

Supported by



James Morrison

Section Engineer
Causeway Coast & Glens Section Office (West)*
County Hall
Castlerock Road
Coleraine
BT51 3HS

E-mail: DfI.CausewayCoast&GlensWest@infrastructure-ni.gov.uk



Ian Lowe

Section Engineer
Causeway Coast & Glens Section Office (East)**
Crown Buildings
37-45 John Street
Ballymoney
BT53 6DT

E-mail: DfI.CausewayCoast&GlensEast@infrastructure-ni.gov.uk

*** West = The former council areas of Coleraine and Limavady**

**** East = The former council areas of Ballymoney and Moyle**

Defects can be reported using our on-line reporting portal at:-

<https://www.nidirect.gov.uk/information-and-services/travel-transport-and-roads/problems-roads-and-streets>

The emergency telephone number is 03002007891.

Flooding can also be reported on the Flooding Incident Line on 0300 2000 100.

Completed Asphalt Resurfacing 2020/21

Route No.	Road Name / Location	Length (m)
West		
A26	Nursery Ave/Terrace Row, Coleraine	575
A29	Carhill Road, Garvagh	1355
A54	Church Street, Kilrea	160
A2	Ballyreagh Road, Portrush	2320
B17	Cloyfin Road (Bushmills Road), Coleraine	530
B62	Ballybogy Road from Oldtown towards Revallagh	2000
B64	Legavallon Road, Dungiven - layby to Gortnagross Road	2400
B64	Edenbane Road, Garvagh	2350
B64	Bridge Street, Kilrea	840
B64	Station Road, Dungiven	440
B185	Cromore Road, Portstewart	1210
C91	Mountsandel Road, Coleraine from Rugby Avenue Roundabout to Knocklynn Road	1500
C529	Drumsumn Road, Drumsumn	675
U2236	Dog Leap Road, Limavady	430
U3517	Beresford Avenue, Coleraine	94

Completed Asphalt Resurfacing 2020/21 (continued)

Route No.	Road Name / Location	Length (m)
East		
A26	Newbridge Road, Ballymoney (near 'Sizzlin Sausage')	770
A44	Moyarget Road, Ballycastle (Whitepark Rd to Magheramore Rd)	900
A44	Coleraine Road, Ballycastle (Leyland Road to Hillside Road)	612
A2	Quay Road, Ballycastle	600
B62	Finvoy Road, Ballymoney (Urban)	1160
B147	Newal Road, Ballymoney	754
A26	Newbridge Road, Ballymoney (Old Coleraine Rd to Seacon Rd)	800
B66	Knock Road, Ballymoney	1060
B64	Duneany Road, Rasharkin	1190
B16	Kilraughts Road, Ballymoney	1100
B67	Castlecatt Road, Bushmills	200

Total Completed Asphalt Resurfacing 25.455 km

at a cost of £5,559,100

Proposed Programme of Asphalt Resurfacing 2021/22

Route No.	Road Name / Location	Length (m)
West		
A29	Carhill Road, Garvagh.	1360
A37	A37 Broad Road at Drumalief, Limavady	2600
A2	Castlerock Road, Coleraine	1110
A2	Castlerock Road, Coleraine - Loreto School bus layby	150
A2	Clooney Road, Greysteel. – RBT to Brislane Road	1220
A2	Burnside Road RBT and Coleraine Road, Portstewart	1190
A2	Seacoast Road Drumavalley, Limavady	1850
A29	Coleraine Ring Road	TBC
B44	Altinure Road, Feeney	1420
B64	Maghera Street, Kilrea from the Diamond Roundabout to 30mph signs and B75 Drumagarner Road from Maghera Street to past the Bus Depot	1420
B64	Upper New Street, Dungiven	175
B66	Ringsend Road, Limavady - Terrydoo Road - Cam Road	2970
B68	Ballyquin Road from Drumaduff Road to Derryork Road	1500
B192	Drumrane Road from Killybleught Bridge for 1370m towards Dungiven	1370
B201	Carthall Roundabout, Coleraine	370
B201	Killane Road, Limavady	610
C92	Knocklynn Road, Coleraine	500
U3371	Gortin Road, Moneydig, Kilrea	110
U3347	Ballydevitt Road, Coleraine	50
U3300	Agherton Road from 30mph to near Ballyleese Pk, Portstewart	250

Proposed Programme of Asphalt Resurfacing 2021/22 (continued)

Route No.	Road Name / Location	Length (m)
East		
B16	Garryduff Road / Bellaghy Road, Dunloy	775
B94	Main Street, Cloughmills	980
A26	Frosses Road, Ballymoney (Kilraughts Rd Roundabout)	475
B67	Moyarget Road, Ballymoney	2130
B67	Moyarget Road, Mosside	1875
A26	Frosses Road, Ballymoney (Ballynalob Road / Station Road)	575
A44	Drones Road, Armoy	1550
B93	Killagan Road, Ballymoney (2 schemes)	2570
B15	Whitepark Road, Ballintoy	1450
C84	Coolkeeran Road, Loughguile	860
A2	Market Street, Ballycastle	550
Total Proposed programme of Asphalt Resurfacing		34.015km
		at an estimated cost of £5,276,000

Completed Bitmac Resurfacing 2020/21

Route No.	Road Name / Location	Length (m)
West		
A6	Foreglen Road hard shoulder opposite filling station at Dungiven	110
B40	Glenedra Road, Feeny	1859
B74	Feeny Rd, Feeny	100
C95	Carragh Road, Bushmills (3 locations)	478
C538	Ballylintagh Road, Coleraine (2 locations)	210
C538	Kinnyglass Road, Coleraine	22
C539	Killeague Road, Coleraine (4 locations)	196
U3035	Leeke Road, Portrush (3 locations)	436
U3036	Ballymagarry Road, Portrush (4 locations)	583
U3053	Oldtown Road, Bushmills (2 locations)	356
U3300	Agherton Rd, Portstewart from Cromore Road to Caravan Park	630
U3300	Islandtasserty Road, Coleraine	50
U3300	Islandtasserty Road, Coleraine (2 locations)	196
U3301	Dundooan Road, Coleraine (2 locations)	196
U3302	Bellefont Road, Coleraine (2 locations)	335
U3310	Liswatty Road, Coleraine (4 locations)	426
U3312	Ballywindelland Road, Coleraine (4 locations)	664
U3320	Glebe Road, Castlerock (2 locations)	106
U3321	Artidillon Road, Castlerock	220
U3325	Fermoyle Road, Coleraine. (3 locations)	467

Completed Bitmac Resurfacing 2020/21 (continued)

Route No.	Road Name / Location	Length (m)
West (cont.)		
U3329	Green Road Upper, Castlerock (3 locations)	482
U3329	Green Road Lower, Castlerock (3 locations)	363
U3334	Drumaquill Road, Coleraine	282
U3334	McMath's Lane, Coleraine	550
U3338	Macleary Road, Coleraine (3 locations)	280
U3340	Glenleary Road, Coleraine (2 locations)	358
U3343	Manager Road, Coleraine	477
U3344	Knockaduff Road, Coleraine	269
U3354	Mettican Road, Garvagh (3 locations)	236
U3369	Whitefalls Road, Garvagh	112
U3366	Ballyagan Road, Garvagh	75
U3366	Movenis Road, Garvagh	306
U3371	Gortin Road, Kilrea (3 locations)	425
U3372	Carrowreagh Road, Kilrea (2 locations)	210
U3376	Drumsaragh Road, Kilrea	20
U3380	Gortmacrane Road, Kilrea	30
U3501	Wheatfield Drive, Coleraine	130
U3415	Laragh Road, Garvagh (2 locations)	137
U3501	Fernhill Crescent, Coleraine	230
U3501	Cranmore Park, Coleraine	78
U3505	Bannvale, Coleraine	410
U3508	Winston Way, Coleraine	170

Completed Bitmac Resurfacing 2020/21 (continued)

Route No.	Road Name / Location	Length (m)
West (cont.)		
U3508	Spring Meadows, Coleraine	210
U3508	Orchardville, Coleraine	130
U3509	Somerset Ridge, Coleraine (2 Locations)	300
U3515	Tamnyrankin Road, Garvagh	106
U3519	Boulavard, Coleraine	356
U3531	Gorran Road, Garvagh (2 locations)	123
U3556	Woodland Park, Kilrea	165
U3364	Glassgort Road, Aghadowey (2 locations)	454
U3571	Ballylintagh Crescent, Coleraine	339
U3581	Moneydig Road, Kilrea (2 locations)	190
U3583	Lisnamuck Park, Coleraine	62
U2143	Upperlane Road, Greysteel	220
U2206	Killunaght Road, Dungiven	410
U2214	Monnaboy Road, Dungiven	517
U2219	Sheskin Road, Greysteel	136
U2237	Carrickmills Lane, Limavady	320
U2241	Newline Road, Limavady	400
U2263	Dremont Road, Limavady	1040
U2274	Bolea Road, near Steel Bridge, Limavady	659

Completed Bitmac Resurfacing 2020/21 (continued)

Route No.	Road Name / Location	Length (m)
West (cont.)		
U2286	Lomond Road, Limavady	550
U2403	Teeavan Road, Dungiven	440
U2403	Turmeel Road, Dungiven	682
U2404	Crebarkey Road, Dungiven (3 locations)	2529
U2406	Boveil Road, Dungiven	572
U2313	Whitehill and Clovervale Limavady	220
U2522	Gortgare Road, Greysteel	325
East		
U4101	Kilmandil Road, Dunloy (2 schemes)	750
C87	Moyan Road, Ballymoney (2 schemes)	240
U4120	Bridge Road, Dunloy	360
U5112	Manister Lane, Mosside	320
U4134	Lisheegan Lane, Ballymoney	285
U4148	Tamlaght Road, Rasharkin	68
Total Completed Bitmac Resurfacing		26.677 Km
at a cost of		£1,666,000

Proposed Programme of Bitmac Resurfacing 2021/22

Route No.	Road Name / Location	Length (m)
West		
B44	Altinure Road, Feeny	1420
B192	Drumrane Road Burnfoot	1370
B201	Windyhill Road, Coleraine	550
U3331	Barmouth Road, Castlerock	70
U3349	Ringsend Village, Ringsend	540
U3463	Farranseer Park, Macosquin	450
U3517	New Row, Coleraine	100
U3543	Eglington Lane, Portrush	215
U3566	Bellany Crescent, Coleraine	56
U3581	Moneydig Park, Moneydig	124
U2209	Old Foreglen Road, Ballymonie, Dungiven	700
U2240	Carrick Avenue, Limavady	250
U2249	Irish Green Street - Limavady	75
U2261	Kilhoyle Road, Drumsurn	170
U2508	Alexander Road, Limavady, Ballyclose St - end	100
U2512	Clovervale, Limavady	82
U2514	Glenmill Park, Limavady	83
U2514	Glenview Drive, Limavady, Glenmore Gdns - end	69
U2515	Coolessan Walk, Limavady	132
U2529	Carnanbane, Dungiven	76

Proposed Programme of Bitmac Resurfacing 2021/22 (continued)

Route No.	Road Name / Location	Length (m)
West (cont)		
U2533	Killylane Cottages, Greysteel	50
U2534	Muldonagh Cottages, Dungiven, Muldonagh Road to end	269
U2538	Drumavally, Limavady	400
East		
U4102	Culcrum Road, Cloughmills (2 schemes)	2125
U4081	Ballyveely Road, Loughguile	1182
C5107	Drumavoley Road, Ballycastle	150
B15	Glenshesk Road, Ballycastle	50
U5119	Novally Road, Ballycastle	150
U4066	Bregagh Road, Armoy	200
Total Proposed Bitmac Resurfacing		11.208km
at an estimated cost of		£730,000

Completed Roads Recovery Fund 2020/21

Route No.	Road Name / Location	Length (m)
West		
A6	Glenshane Road, Dungiven (Patching)	60
B64	Legavallon Road, Dungiven - The Pot (Embankment repairs)	75
B64	Legavallon Road, Dungiven - Semples Farm (Embankment repairs)	220
B192	Drumrane Road, Largy, Limavady (Embankment repairs - 3 locations)	360
U2263	Dremont Road, Limavady (Carriageway reconstruction)	240
U2289	Burnally Road, Limavady (Slope Stability)	100
East		
B62	Gate End, Ballymoney	30
B66	Bann Road, Bendooragh	217
U4134	Bendooragh Road, Ballymoney	300
C90	Burnquarter Road, Ballymoney (2 stretches)	665
U4111	Loughabin Road, Ballymoney (2 stretches)	435
C86	Knockahollet Road, Ballymoney	47
U4081	Clintyfinnan Road, Ballymoney (3 stretches)	249
U4110	Cushnahans Road, Ballymoney.	165
U4123	Bravallen Road, Ballymoney (2 stretches)	100
U4105	Navery Road, Ballymoney (3 stretches)	660
U4141	Lisheegan Road, Ballymoney (2 stretches)	160
U4082	Kingariff Road, Ballymoney	95
U4083	Carrowcrin Road, Armoy	440

Completed Roads Recovery Fund 2020/21 (continued)

Route No.	Road Name / Location	Length (m)
East (cont.)		
U5065	Ballykenver Road, Armoy. (2 stretches)	329
U5042	Glenstaughey Road, Ballintoy.	297
C81	Fivey Road, Magherahoney.	320
U4100	Ballyportery Road, Loughguile.	197
U4094	Ballyweaney Road, Loughguile.	100
C84	Corkey Road, Cloughmills.	203
C104	Gaults Road, Cushendall.	50
U4546	Beechwood Drive, Balnamore	264
Total Completed Roads Recovery Fund		6.383 km
at a cost of		£786,000

Proposed Programme of Roads Recovery Fund 2021/22

Route No.	Road Name / Location	Length (m)
West		
A37	Broad Road at Drummond Bends, Limavady – Slope Stability.	100
U2261	Kilhoyle Road, Limavady. - Culvert & Slope Stability.	170
U2263	Dremont Road, Limavady - Sidfill	80
East		
B147	Kirk Road, Ballymoney.	276
C61	Drumabre Road, Cloughmills	220
C89	Tullaghans Road, Dunloy	96
C59	Lisnahuncheon Road, Rasharkin	133
U4147	Dreen Road, Rasharkin	27
U4059	Ballymacfin Road, Ballymoney	259
B94	Drumadoon Road, Cloughmills	130
U4082	Kingariff Road, Ballymoney	217
U4129	Ballywindeland Road, Ballymoney	120
U4115	Farran Road, Ballymoney	165
C94	Storan Road, Dervock (2 stretches)	220
U4145	Doneysheil Road, Rasharkin	128
C90	Gortstagherty Road, Ballymoney	203
U4109	Pinehill Road, Ballymoney	260
U4076	Heagles Road, Ballybogey (2 stretches)	184

Proposed Programme of Roads Recovery Fund 2021/22 (continued)

East (cont.)

U4114	Boyland Road, Ballymoney	120
U4143	Bridge Road, Dunloy	140
C0090	Burnquarter Road, Ballymoney	325
C0086	Knockahollet Road, Ballymoney	205
U4101	Kilmandil Road, Cloughmills	400
C0084	Corkey Road, Loughguile (2 stretches)	560
U4098	Tober Road, Ballymoney (2 stretches)	400
U4095	Lislabin Road, Ballymoney (2 stretches)	262
U5047	Cabragh Road, Bushmills (2 stretches)	480
U5091	Ballyvenaght Road, Ballyvoy	200
U5046	Cozies Road, Bushmills (2 stretches)	280
U5119	Novally Road, Ballycastle	300
U4090	Friary Road, Magherahoney	270
U4083	Carrowcrin Road, Armoy	200
U4100	Ballyportery Road, Ballymoney	320
C0081	Fivey Road, Magherahoney	300
U5076	Glentop Road, Ballycastle	360
U5061	Urbal Road, Mosside	250
U5103	High Street, Cushendall	150
U5505	Gortamaddy Drive, Ballycastle	43

Total Proposed Roads Recovery Fund **8.55 Km**
at an estimated cost of **£856,000**

Completed Footway Asphalt Resurfacing 2020/21

Route No.	Road Name / Location	Length (m)
West		
A2	Castlerock Road, Coleraine, Princess Gardens to Loreto	240
A2	Dunluce Road, Bushmills (At school)	152
A26	Nursery Avenue & Terrace Row, Coleraine	870
B64	Legavallon Road, Dungiven, Layby - Gortnagross Road	92
B64	Station Road, Dungiven	846
B201	Wheatsheaf Road, Coleraine	45
C529	Drumsum Road, Drumsum	665
C546	Blackrock Road, Kilrea	328
C549	Lisnagrot Road, Kilrea	87
U3300	Agherton Road, Portstewart, Coleraine Road - Graveyard	212
U3425	Pond Road/Mill Road, Kilrea	87
U3508	Hazelbank Road at Pates Lane, Coleraine	266
U3508	Drumard Drive, Coleraine	185
U3508	Drumard Drive, Coleraine, The Creeve - Hazelbank Road	320
U3508	Laurel Hill Road, Coleraine (House Nos. 43 and 57)	114
U3508	Buskin Way, Coleraine	57
U3508	Strand Road, Coleraine (House Nos. 73 and 81)	60
U3508	Lambeth Way, Coleraine	162
U3508	Athol Avenue, Coleraine	130
U3517	Beresford Avenue, Coleraine	94
U3526	Atlantic Road/Loughan Hill Park, Coleraine	477
U3536	Old Coach Road, Portstewart	312

Completed Footway Asphalt Resurfacing 2020/21 (continued)

Route No.	Road Name / Location	Length (m)
West (cont.)		
U3536	Whyns Crescent, Portstewart.	283
U3536	Garden Avenue, Portstewart	202
U3549	Carneybaun Road, Portrush	1028
U3556	Larchfield Gardens, Kilrea	1368
U3556	Oakfields Place, Kilrea	231
U3556	Beechfield Gardens, Kilrea	350
U3556	Woodland Park, Kilrea	222
U3562	Exorna Park, Articlave	227
U3565	Glebe Crescent, Castlerock	70
U3583	Lisnamuck Road, Coleraine	60
East		
C91	Vow Road, Ballymoney	255
U4506	Woodview Park, Ballymoney (2 stretches)	250
U4540	Bellmount, Rasharkin	100
B16	Kilraughts Road, Ballymoney	115
U4518	Heatherlea Place, Ballymoney	185
U4535	Rosemount Park, Cloughmills	170
U5524	Ardmoyle Park, Cushendall (2 schemes)	730
Total Completed Asphalt Footway Resurfacing		2,789km
at a cost of		£431,000

Proposed Programme of Footway Asphalt Resurfacing 2021/22

Route No.	Road Name / Location	Length (m)
West		
A26	Bannfield Road, Coleraine (opposite Tesco's exit)	120
U3515	Glenwood Avenue, Coleraine	264
U3515	Gleneldon Court, Coleraine	250
U3515	Gleneldon Court, Coleraine	430
U3517	Mount Street, Coleraine	380
U3526	Woodburn Crescent to Ballysally Road, Coleraine	116
U3527	Lisnablagh Road, Coleraine (203 and 237)	56
U3527	Silverthorn Avenue, Coleraine	298
U3527	Lisnablagh Road to Maythorn Avenue	178
U3534	Berne Road Portstewart, from house 1 to car park	100
U3549	Oaklands Avenue, Portrush	558
U2515	Coolessan/Woodland Walk, Limavady	260
Potential footway schemes being developed		
C91	Mountsandel Road, Coleraine, St Patricks Ave	
U3543	Princess St, Portrush	
U3549	Oaklands Avenue, Portrush	
U2508	Alexander Road, Limavady	
U2508	Greystone Park, Irish Green St To Kerb Limavady	
U2509	Shanreagh Park, Limavady	
U2513	Drumachose Park, Limavady	
U2516	Mitchel Park, Dungiven, Fence To Fence Line	

Proposed Programme of Footway Asphalt Resurfacing 2021/22 (continued)

Route No.	Road Name / Location	Length (m)
West (cont.)		
Potential footway schemes being developed (cont.)		
U2517	Walworth Park1, Walworth Rd To Cul De Sac Limavady	
U2132	Brisland Rd, Clooney Rd To Craigbrack Rd Limavady	
U2537	Bonnanaboigh Stage 1, Bonnanaboigh Stage 2 To Kerb Limavady	
U2516	Rannyglas, Dungiven	
F2531	Glenview Park Footpath	
F2531	Glenview Park Footpath	

All of the above potential footway schemes are subject to proposed Utility Works for fibre optics being completed

East

C91	Charlotte Street, Ballymoney	493
B16	Garryduff Road, Ballymoney	141
U4124	Lislagan Road, Ballymoney	252
B66	Knock Road, Ballymoney	253
C92	Old Coleraine Road, Ballymoney	440
B147	Newal Road, Ballymoney (6 stretches)	286
U4500	Milltown Avenue, Ballymoney (3 stretches)	39
U4518	Riada Avenue, Ballymoney (7 stretches)	547
U4517	Stuart Park, Ballymoney (5 stretches)	286
U4517	Antrim Park, Ballymoney (4 stretches)	472

Proposed Programme of Footway Asphalt Resurfacing 2021/22 (continued)

Route No.	Road Name / Location	Length (m)
East (cont.)		
B93	Killagan Road, Dunloy	510
U5085	Blackpark Road, Ballyvoy	130
U5505	Moyle Road, Ballycastle	20
U5524	Moyle View, Cushendall	200
U5505	Beechwood Avenue, Ballycastle	300
U5503	Leyland Park, Ballycastle	380
U4531	Knockard Park, Loughguile	120
U4086	Shelton Road, Loughguile	150
C84	Coolkeeran Road, Loughguile	130
U4543	Kilwee Gardens, Loughguile	240
Total Proposed Footway Asphalt Resurfacing		9.688km
		at an estimated cost of £679,000

Completed Programme of Surface Dressing 2020/21

Route No.	Road Name / Location	Length (m)
West		
B207	Moneybrannon Road, Coleraine	1454
C93	Ballylagan Road, Coleraine	1849
C533	Dunboe Road, Castlerock	993
C537	Castleroe Road, Coleraine	1856
C542	Lisnamuck Road, Coleraine	3238
C546	Bovedy Road, Kilrea	3400
C549	Lisnagrot Road, Kilrea	1616
U3032	Craigaboney Road, Bushmills	1627
U3036	Ballymacrea Road, Portrush	2419
U3300	Cappagh Road, Portstewart	618
U3302	Roselick Road, Portstewart	1659
U3303	Loguestown Road, Coleraine	1523
U3309	Ballyversal Road, Coleraine.	3515
U3316	Burrenmore Road, Castlerock	2257
U3316	Ballyhackett Road, Castlerock	1710
U3317	Ballywoodock Road, Castlerock	1942
U3319	Altikeeragh Road, Castlerock	2707
U3319	Altikeeragh Road, Castlerock	3090
U3325	Isle Road, Coleraine	2755
U3331	Exorna Lane, Articlave	343
U3333	Masteragwee Road, Coleraine	2537
U3347	Ballydevitt Road, Coleraine	1448
U3348	Crevolea Road, Coleraine	2156
U3355	Plantation Road, Garvagh	5524

Completed Programme of Surface Dressing 2020/21 (continued)

Route No.	Road Name / Location	Length (m)
West (cont.)		
U3356	Ballyrogan Road, Garvagh	1467
U3370	Moneydig Road, Kilrea	2579
U3373	Mullan Road, Kilrea	1180
U3375	Erganagh Road, Kilrea	1267
U3376	Hillhead Road, Kilrea	1465
U3377	Blackrock Rd, Kilrea	1877
U3379	Barnside Road, Kilrea	1641
U3381	Dunbane Road, Kilrea	860
U3411	Drumbane Road, Garvagh	2809
U3413	Culbane Lane, Garvagh	696
B44	Altinure Road, Feeny	571
C518	Myrtle Road, Greysteel	467
C518	Dunlade Road, Greysteel	2217
C528	Mill Road, Greysteel	1657
C532	Brighter Road	2296
U2143	Dungullion Road, Greysteel	2418
U2143	School Road, Limavady	680
U2219	Monnaboy Road, Greysteel	705
U2201	Flanders Road, Dungiven	1205
U2226	Loughermore Road, Ballykelly	1012
U2228	Tartnakilly Road, Ballykelly	1268
U2229	Sistrakeel Road, Ballykelly	2711
U2232	Highlands Road, Limavady	2228
U2232	Highlands Road, Limavady	1410

Completed Programme of Surface Dressing 2020/21 (continued)

Route No.	Road Name / Location	Length (m)
West (cont.)		
U2232	Highlands Road, Limavady	832
U2233	Tully Road, Limavady	2426
U2236	Dogleap Road, Limavady	2187
U2240	Carrick Road, Limavady	1127
U2262	Drumaduff Road, Limavady	3008
U2285	Scotchtown Road, Limavady	2366
East		
B147	Ballinlea Rd, Armoy	3400
C81	Fivey Rd, Stranocum (2 sites)	3613
C94	Carncullagh Road, Dervock	1974
U4060	Urbal Road, Ballymoney	2396
U4061	Lisconnan Road, Ballymoney (2 sites)	3276
U4062	Conagher Road, Ballymoney (2 sites)	5471
U4105	Navery Road, Ballymoney	468
U4110	Lisboy Road, Ballymoney	1554
U4111	Loughabin Road, Ballymoney	593
U4125	Mullan Road, Ballymoney	2286
U4143	Gortahar Road, Rasharkin	2421
U4143	Glenbuck Road, Dunloy	3722
C99	Carnborne Road, Bushmills	4339
C100	Drumnagee Road, Ballycastle	2501
U5035	Araboy Road, Ballycastle	1386
U5039	Red Road, Ballycastle	1300

Completed Programme of Surface Dressing 2020/21 (continued)

Route No.	Road Name / Location	Length (m)
East (cont.)		
U5041	Lagavara Road, Ballintoy (3 sites)	4237
U5043	Turfahon Road, Bushmills	520
U5050	Riverside Road, Bushmills	2362
U5051	Ballynarry Road, Derrykeighan	2921
U5053	Carnelis Road, Ballycastle	4241
U5126	Scallys Road, Bushmills	673
Total Completed Surface Dressing		262.235km
at a cost of		£1,785,000

Completed Programme of Surface Dressing 2021/22

Route No.	Road Name / Location	Length (m)
West		
B188	Mullaghinch Road, Moneydig	1140
C533	Dunboe Road, Articlave	1100
C538	Kinnyglass Road, Mullan	3751
C538	Ballylintagh Road, Mullan	1425
C539	Killeague Road, Killeague	2186
U3035	Leeke Road, Bushmills	3515
U3036	Ballymagarry Road, Portrush	1769
U3053	Crawfords Lane, Bushmills	432
U3300	Islandtasserty Road, Portstewart	1185
U3301	Dundooan Road, Coleraine	1170
U3302	Belemont Road, Portstewart	1093
U3310	Liswatty Road, Coleraine	2,098
U3315	Drumagully Road, Downhill	881
U3317	Springbank Road, Castlerock	979
U3320	Ballymadigan Road, Milltown	1096
U3320	Church Pass, Milltown	40
U3321	Artidillon Road, Castlerock	892
U3321	Artidillon Road, Coleraine	827
U3327	Dartries Road, Articlave	792
U3329	Green Road Lower, Articlave	1851
U3329	Green Road Upper, Coleraine	1748
U3332	Ardina Road, Articlave	800
U3334	Drumaquill Road, Coleraine	824
U3334	Drumaquill Road, Coleraine	801

Completed Programme of Surface Dressing 2021/22 (continued)

Route No.	Road Name / Location	Length (m)
West (cont.)		
U3334	Drumaquill Road, Coleraine	53
U3335	Ballycairn Road, Coleraine	1536
U3338	Macleary Road, Macosquin	1362
U3338	Macleary Road, Macosquin	585
U3338	Killure Road, Macosquin	1563
U3338	Killure Road, Macosquin	100
U3339	Powerstation Road, Macosquin	584
U3339	Powerstation Road, Macosquin	123
U3343	Managher Road, Coleraine	2330
U3344	Knockaduff Road, Coleraine	4649
U3345	Rusky Park, Coleraine	2993
U3362	Killykergan Road, Garvagh	947
U3363	Cullycapple Road, Coleraine	1239
U3363	Cullycapple Park, Coleraine	166
U3364	Glasgort Road, Agivey	2414
U3365	Clagan Park, Coleraine	857
U3369	Whitefalls Road, Garvagh	661
U3380	Gortmacrea Road, Bovedy	1611
U3412	Brockagh Road, Garvagh	2033
U3415	Tamnyrankin Road, Swatragh	1837
U3415	Laragh Road, Swatragh	1881
B202	Point Road, Magilligan	1380
B202	Point Road, Magilligan	2510
C519	Carnmuff Road, Ballykelly	1080

Completed Programme of Surface Dressing 2021/22 (continued)

Route No.	Road Name / Location	Length (m)
West (cont.)		
C520	Glenhead Road, Limavady	1150
C521	Polly's Brae Road, Limavady	2397
C522	Altmore Road, Dungiven	2285
C522	Altmore Road, Dungiven	2125
C526	Derryork Road, Dungiven	860
C527	Gortnagross Road, Dungiven	2414
U2132	Brisland Road, Greysteel	964
U2231	Station Road, Ballykelly	275
U2232	Station Road, Ballykelly	1482
U2233	Sesnagh Road, Limavady	400
U2254	Drumbane Road, Dungiven	2321
U2268	Ballyleaghry Road, Drumsumn	1460
U2281	Duncrun Road, Bellarena	3433
U2281	Duncrun Road, Bellarena	485
U2284	Limestone Road, Magilligan	1663
U2284	Curragh Road, Drumavalley	1586
U2289	Spallen Road, Ballykelly	2146
U2290	Carse Hall Road, Ballykelly	1367
U2407	Corick Road, Dungiven	1050
East		
B66	Castlecatt Road, Dervock	1840
C87	Moyan Road, Ballymoney	3180
C91	Glenstall Road, Ballymoney	4554

Completed Programme of Surface Dressing 2021/22 (continued)

Route No.	Road Name / Location	Length (m)
East (cont.)		
C91	Vow Road, Ballymoney	2472
C92	Macfin Road, Ballymoney (2 sites)	3719
U4065	Chatham Road, Armoy	960
U4068	Feigh Road, Ballymoney	2161
U4073	Bellisle Road, Ballymoney	1965
U4078	Greenhill Road, Ballymoney	510
U4111	Loughabin Road, Ballymoney	1215
U4119	Galdanagh Road, Ballymoney (3 sites)	3959
U4120	Presbytery Lane, Dunloy	1805
U4148	Tamlaght Road, Rasharkin	3335
U5029	Clogher Road, Bushmills	2319
U5031	Dundarave Road, Bushmills	1120
U5033	Isle Road, Bushmills	2215
U5055	Faltaggart Road, Ballycastle	920
U5118	Gortconny Lane, Ballycastle	843
U5121	Carrowcroey Road, Armoy	1930
Total Completed Programme of Surface Dressing		141.87km
at an estimated cost of		£1,018,000

Completed Drainage Work 2020/21

Route No.	Road Name / Location	Description
West		
A54	Agivey Road, Aghadowey	300m of pipe & 10 gullies
A2	Dunluce Road, Portrush (Royal Court)	20m of pipe & 3 gullies
B70	Boleran Road, Garvagh	40m of pipe & 2 gullies
B201	Windyhill Road, Coleraine	Culvert, 72m of pipe & 2 gullies
C95	Ballyclough Road, Bushmills	104m of pipe & 4 gullies
C96	Corbally Road, Portrush	Culvert, 225m of pipe & 6 gullies
C524	Lisnamuck Road, Aghadowey	98m of pipe & 6 gullies
C529	Drumsumn Road, Drumsumn Village	314m of pipe, 5 gullies & 2 manholes
C529	225 Drumsumn Road	18m of pipe & 2 gullies
C529	Drumsumn Road at Drumaveeny Bridge	88m of pipe, 5 gullies & 3 manholes
C529	Drumsumn Road	12m of pipe, 2 gullies & 1 manhole
U3321	Artidillion Road, Castlerock	222m of pipe & 10 gullies
U3349	Ringsend Village, Ringsend	80m of pipe & 3 gullies
U3356	Woodland Park, Kilrea	60m of pipe & 6 gullies
U3366	39 Brone Road, Garvagh	Culvert, 343m of pipe, 8 gullies & 2 manholes
U3377	Blackrock, Kilrea	9m of pipe & 3 gullies
U3570	Keely Gardens, Coleraine	10m of pipe, 2 gullies & 1 manhole
U2510	Crawford Square, Limavady	52m of pipe & 37 gullies
U2219	Sheskin Road, Greysteel	110m of pipe & 2 manholes

Completed Drainage Work 2020/21 (continued)

Route No.	Road Name / Location	Description
West (cont.)		
U2239	Moyse Road	22m of pipe, 8 gullies & 6 manholes
U2243	Straw Road, Burnfoot	Culvert, 365m of pipe, 15 gullies & 3 manholes
U2248	Gortnaghey Road	295m of pipe, 16 gullies & 3 manholes
	26 Various locations	Installation of single gullies
East		
A44	Moyarget Road, Ballycastle	450mm dia. culvert replacement & 2 chambers
U5103	Ballybrack Road, Cushendall	Emergency Culvert replacement
B67	Benvardin Road, Derrykeighan	3 access chambers
A2	Coast Road, Waterfoot	300mm dia. culvert replacement
B62	Craigs Road, Rasharkin	150m of pipe, 3 manholes & 5 road gullies
U5065	Ballykenver Road, Armoy	New soakaway
A2	Cushendall Road, Ballyvoy	20m of pipe & 1 road gully
A44	Drones Road, Armoy	Culvert works
C87	Pharis Road, Loughguile	20m of pipe & 2 road gullies
U5102	Cairns Road, Cushendall	130m of pipe & 6 road gullies
A43	Glenariff Road, Waterfoot	300m of pipe & 10 road gullies
C84	Hillside Road, Armoy	Culvert works

Total drainage work completed at a cost of £421,000

Proposed Programme of Drainage Work 2021/22

Route No.	Road Name / Location	Description
West		
A37	Dunhill Road near Isle Road Coleraine.	30m of pipe & 2 gullies
A2	Ballykelly Road – Limavady.	Investigate/repair blocked Gullies
A2	Mussenden Road – Downhill.	Replace broken pipe
B67	Ballycastle Road - Coleraine.	Investigate / repair blocked Gully
B68	Ballyquin Road - Limavady	Pipe sheugh at farm and repair verge
B185	Station Road – Portstewart.	Culvert
B207	Mullaghinch Road - Coleraine.	6 gullies 100m pipe
U2235	Carlaragh Road - Limavady	New gully required
U2529	Carnanbane Road - Limavady	Drainage required – Junction To Kerb
U3036	Craigahulliar Road - Portrush.	Additional gullies required
U3302	Roselick Road - Portstewart.	Connection to Manhole
U3348	Crevolea Road - Coleraine.	5 Gullies required
U3508	Drumard Drive - Coleraine.	New replacement gully required
U3517	Circular Road - Coleraine.	Investigate/repair blocked Gully
U3526	Artillery Road - Coleraine.	Investigate/repair blocked Gully
U3526	Artillery Road - Coleraine.	Drainage Investigation
U3526	Milburn Estate - Coleraine.	Replacement Gully pots
U3543	Eglinton Lane – Portrush.	Replace Gully pot near No. 140

Proposed Programme of Drainage Work 2021/22 (continued)

Route No.	Road Name / Location	Description
East		
U4129	Ballywindelland Road, Ballymoney	210m of pipe & 10 road gullies
C90	Burnquarter Road, Ballymoney	82m of pipe & 5 road gullies
A26	Newbridge Road, Ballymoney	150m of pipe & 2 manholes
U4128	Taughey Road, Ballymoney	50m of pipe & 2 road gullies
C91	Balnamore Road, Ballymoney	3 no. road gullies
U4124	Drumskea Road, Ballymoney	15m of pipe & 2 road gullies
B147	Ballinlea Road, Armoy	10m of pipe & 1 road gully
U4134	Lisheegan Lane, Ballymoney	10m of pipe & 1 manhole
U4123	Bravallen Road, Ballymoney	3 no. road gullies
B67	Benvardin Road, Ballymoney (2 stretches)	960m of pipe & 27 road gullies
C89	Tullaghans Road, Dunloy (3 stretches)	189m of pipe & 14 road gullies
U4140	Slievenaghy Road, Ballymoney (5 stretches)	744m of pipe & 19 road gullies
U4142	Magheraboy Road, Ballymoney (4 stretches)	763m of pipe & 22 road gullies
U4141	Lisheegan Road, Ballymoney	69m of pipe & 3 road gullies
U5062	Knockmore Road, Mosside	40m of pipe & 3 road gullies
B15	Whitepark Road, Ballintoy	230m of pipe & 10 road gullies
U5505	Cedar Drive, Ballycastle	1 no. road gully
C106	Glendun Road, Cushendun	Culvert replacement

Proposed Programme of Drainage Work 2021/22 (continued)

Route No.	Road Name / Location	Description
East (cont.)		
U4096	Carnamenagh Road, Loughguile	Culvert replacement
U4095	Lislabin Road, Loughguile	Culvert replacement & new manhole
U4088	Reservoir Road, Loughguile	120m of pipe & 4 road gullies

Total proposed programme of drainage work at an estimated cost of £305,000

Completed Major Utility Works 2020/21

Utility	Road Name	Scheme Details
West		
NIE	Rugby Avenue	Replacement HV cables
NIE	Ring Road (Sandelford Bridge)	Replacement HV cables
NIW	Mountsandel Road	Replacement Watermain
NIW	Windyhill Rd (Ballinrees Reservoir)	Replacement Watermain
East		
NIW	Bann Road, Ballymoney	New Watermain

Proposed Major Utility Works 2021/22

Utility	Road Name	Scheme Details
West		
BT	Coleraine, Garvagh, Kilrea, Limavady	Superfast fibre optic rollout – mainly footway works.
Fibrus	Kilrea	Superfast fibre optic rollout – mainly footway works.
Firmus	Coleraine area	No major schemes, just connections in Triangle Area.
NIE	Glen Rd, Garvagh	HV cable laying to Windfarm.
NIE	Seacoast Rd, Duncrun Rd, Point Rd	HV cable laying to substation at Magilligan prison.
NIE	Lisnasrehog Rd, Temple Rd	HV cable laying to Windfarm – 90% completed.
NIW	Windyhill Rd, Tullyarmon	Replacement watermains – started May 2021.

East

NIW	B66 Bann Road, Ballymoney	New Watermain – Phase 2
Firmus Gas	Drumnamallaght Road, Ballymoney	New Gas Main
Firmus Gas	The Meadows, Ballymoney	New Gas Main
Firmus Gas	Ishlan Court, Ballymoney	New Gas Main
Firmus Gas	Westoncroft Avenue, Ballymoney	New Gas Main
Firmus Gas	Knock Road, Ballymoney	New Gas Main
Firmus Gas	Benvardin Road & Castlecatt Road, Bushmills	New Gas Main

The details above are based on best information available to DfI Roads at this time.

Winter Service 2020/21

The aim of Winter Service is to ensure, as far as possible, that main road traffic can move safely and freely in wintry conditions by spreading salt at the most effective times. Criteria have been devised to identify the most trafficked roads that carry approximately 80% of traffic and therefore provide the best cost benefit within the available budget.

The Causeway Coast & Glens depots (based at Northbrook, Coleraine; Market Street, Ballymoney and Aghanloo, Limavady) salt 912km of roads during a scheduled action using 14 gritters. Some of this salting is carried out on routes outside of the Council area and some routes within the Council area are salted by depots from neighbouring Council areas in order to achieve optimum operational efficiency, and complete a salting action in just over 3 hours.

DfI Roads carried out 83 equivalent full salting actions during the 2020/21 Winter Season in Causeway Coast & Glens; the first action being on 22 November 2020 and the last on 13 April 2021. Approximately 9,682 tonnes of salt was used.

Due to the high costs involved to ensure salting is carried out only when necessary and at the appropriate time, Northern Division have 12 Duty Controllers on the Winter Service rota. Duty Controllers decide when to salt and use a range of information including Met Office forecasts, real time information available from the 21 DfI Roads weather stations across Northern Ireland, and if necessary from scouting reports obtained from staff measuring road surface temperatures.

Information on our salting activities continues to be relayed electronically to the broadcast media to ensure that the latest news on road conditions is available to motorists across Northern Ireland. Additional information, including our Winter Service leaflet, can be found on our website along with advice on driving in poor weather conditions.

[Gritted Roads \(arcgis.com\)](http://arcgis.com)




SECTION 3

NETWORK DEVELOPMENT

Network Development Manager: Alan Keys

Supported by:-



Bronagh Gillespie

Minor Improvements and Traffic Management
County Hall
Castlerock Road
Coleraine

BT51 3HS

E-mail: Bronagh.Gillespie@infrastructure-ni.gov.uk



Seamus Quinn

Street Lighting
County Hall
Castlerock Road
Coleraine

BT51 3HS

E-mail: Seamus.Quinn@infrastructure-ni.gov.uk

3.1 Minor Improvements

Completed Active Travel Schemes 2020/21

A6 Foreglen Rd - Dernaflaw to opposite Derrychrier Rd - Footway/Cycleway - £210,000

The scheme provided 980 metres of shared footway and cycleway on the existing hard shoulder along this section of Foreglen Road. These works have extended the existing provision of footways and cycleways at Dernaflaw and will facilitate active travel in this area.



Foreglen Road, Dernaflaw - Completed scheme May 2020

Completed Active Travel Schemes 2020/21 (continued)

A6 Foreglen Road, Owenbeg - Footway/Cycleway - £51,300

This scheme upgraded 300 metres of existing footway opposite the Owenbeg GAA facility to a shared footway and cycleway. It also provided an upgrade of a further 185 metres of existing footway adjacent to the Filling Station, opposite the junction of Feeny Road, to a shared footway cycleway. The completion of these sections provides active travel facilities on Foreglen Road from the junction with Feeny Road to the junction with Derrychrier Road, a distance of approximately 2.5km (1.5miles).



Foreglen Road, Owenbeg - Completed scheme May 2020

Proposed Active Travel Schemes 2021/22

As a result of funding received from the Blue Green Fund the following schemes will be progressed to further encourage and promote active travel in the area:

A6 Foreglen Road, Ovil, Dungiven – Footway/cycleway - £127,000

The scheme provides a further 640 metres of shared footway and cycleway on the existing hard shoulder along this section of Foreglen Road. These works extend the existing provision of shared footways and cycleways along Foreglen Road and facilitate active travel in this area.



Foreglen Road, Ovil, Dungiven – Completed scheme.

Proposed Active Travel Schemes 2021/22

B119 Freehall Road, Castlerock, Coleraine – Footway - £260,000

Subject to the successful acquisition of land it is proposed to extend the existing footway from the edge of the housing development on Freehall Road to Mussenden Road. The existing verges will be lowered and widened on the bends, resulting in improved forward visibility for drivers and safety for pedestrians. This proposal will link up existing footways along this popular walking route, further encouraging active travel.

A2 Clooney Road, Ballykelly – Footway/cycleway - £400,000

The scheme will provide a footway and cycleway on the existing hard shoulder from Forest Drive, Walworth for 1.9km towards Greysteel. These works will facilitate active travel in this area.

Proposed Active Travel Schemes 2021/22 (continued).

B61 Bellaghy Road, Dunloy - Footway - £43,000

Subject to the successful acquisition of land it is proposed to extend the existing footway from the new housing development adjacent to Bellaghy Park to Anticur Road. The new footway at the housing development has been provided by the developer. This proposal will complete this section of footway along the busy Bellaghy Road and also encourage active travel

A2 Clooney Road, Greysteel– Footway/cycleway - £375,000

The scheme will provide a footway and cycleway on the existing hard shoulder from the Vale Centre to Longfield Roundabout. These works will also facilitate active travel in the area and will provide a link to a similar facility proposed by Western Division approaching Longfield roundabout from Campsie.

A29 Beechfield to Bushmills Rd Roundabout, Coleraine – Footway/cycleway - £185,000

The scheme will provide a footway and cycleway on the existing hard shoulder from Beechfield Park to Bushmills Rd Roundabout. These works will extend the existing provision along Ring Road and further promote active travel in the area.

A29 Bushmills Rd Roundabout to Portrush Rd Roundabout, Coleraine – Footway/cycleway - £325,000

The scheme will provide a footway and cycleway on the existing hard shoulder from Bushmills Rd Roundabout to Portrush Rd Roundabout. These works will extend the existing provision along Ring Road and further promote active travel in the area.

Proposed Minor Improvement Schemes 2021/22

A54 Agivey Road, Kilrea - Realignment of the carriageway - £900,000

A road improvement scheme has been designed and land acquisition is currently at an advanced stage. It is hoped to carry out some advance works later in the financial year ahead of the main scheme commencing later in 2022.

This scheme will improve the vertical and horizontal alignment of the road, widen the existing carriageway and provide verges for 600m. This will improve the forward sight distance on this stretch of road and therefore the overall road safety.

3.2 Traffic

Completed Traffic Schemes 2020/21

Traffic Management Schemes

Portrush Road with Portstewart Road at Millburn and Artillery Road, Coleraine – The Traffic Signals equipment at this junction has been replaced and upgraded to Low Voltage operation with LED lights.

Market Street, Linenhall Street, Charles Street, Victoria Street, Ballymoney – The Traffic Signals equipment at this junction has been replaced and upgraded to Low Voltage operation with LED lights

A26 Frosses Road south east of the Burnquarter Road, Ballymoney – A hard standing on the road side verge to facilitate a Road Safety Camera Vehicle has been provided.

Meeting House Street, Ballymoney - provision of a lay-by – To assist with traffic progression a lay-by was provided on Meeting House Street near to Smyth's Store.

Traffic Calming Schemes

Lansdowne Road, Portrush – To control the speed of traffic additional speed cushions were introduced in the vicinity of the Lansdowne area.

Transportation - Pedestrian Measures

Reservoir Road, Corkey – A 75m length of footway was provided on the Reservoir Road to link the existing footways along this road.

Upgrade of Zebra Crossings – The Zebra crossing lights at Terrace Row were upgraded to LED high intensity units. (Internally illuminated black and white poles, flashing belisha beacons, and lanterns)

Willow Crescent / Loughermore Road Ballykelly – Dropped kerbs to improve pedestrian crossing facilities have been provided in the area.

Part-time 20mph Speed Limits at Schools

Infrastructure Minister, Nichola Mallon announced on the 7 September 2020 the roll out of part time 20mph speed limit schemes at 103 schools across Northern Ireland so that parents, children and staff will be safer as they go to and from school.

Completed Traffic Schemes 2020/21 (continued)

At each of the schools, new standard fixed speed limit roundel signs are erected with flashing amber lights set to come on at the times the reduced speed limit applies. This follows trials at a number of schools to determine the effectiveness of this arrangement. It was found they have a positive impact on the reduction in mean speed.

In line with the Departmental policy an assessment was carried out at each school within the borough and the following schools now have part-time 20mph speed limits.

- Ballytober Primary School, Bushmills.
- Bushvalley Primary School, Stranocum.
- Carnalridge Primary School, Portrush.
- Drumrane Primary School, Burnfoot.
- Eden Primary School, Ballymoney.
- Garryduff Primary School, Ballymoney.
- St. Canice Primary School, Feeny.
- St Matthew's Primary School, Drumsurn.
- St Patrick's & St Joseph's, Garvagh.

Minor Traffic Management Measures

Taxi Rank at Portstewart - Legislation for the removal of the taxi rank at O'Hara Court on the Coleraine Road has recently come into effect and the necessary work completed.

Accessible Parking, Portstewart - Legislation for an accessible parking space in the vicinity of the Post Office in Portstewart has recently come into effect and the required work instructed.

Mountsandel Road, Coleraine - To assist traffic progression during peak hours, waiting restrictions have been approved along the Mountsandel Road. The Waiting Restrictions Order (Northern Ireland) 2021 came into operation on the 19th April 2021.

Lisnahunshin Road Rasharkin – Upgrade of signage and road markings.

Knockahollet Road / Moyan Road Crossroads Ballymoney - Upgrade of signage

Knockahollet Primary School Ballymoney – Upgrade of signage

Killowen Primary School Coleraine – Upgrade of signage

Directional Signage - Work is ongoing to renew a number of directional signs within the Causeway Coast and Glens Council area.

Proposed Traffic Schemes 2021/22

Traffic Management Schemes

Lodge Road Roundabout, Coleraine – It is proposed to renew the traffic signal equipment at this junction and upgrade to Low Voltage operation with LED lights

A2 Bann Bridge at Hanover Place, Coleraine – It is proposed to renew the traffic signal equipment at this junction and upgrade to Low Voltage operation with LED lights.

A26 Newbridge Road at Hospital Coleraine – It is proposed to renew the traffic signal equipment at this junction and upgrade to Low Voltage operation with LED lights

Coleraine Car Park VMS – The future operation of the car park VMS is currently being considered in conjunction with council officials.

Traffic Calming Schemes

Larchfield Gardens, Kilrea – It is proposed to introduce additional speed cushions north of the junctions with Oakfield Place to encourage lower traffic speeds.

St Conor's School, Kilrea – It is proposed to upgrade the electronic flashing signs to allow the remote monitoring of faults.

Irish Society Primary School, Coleraine – It is proposed to upgrade the existing electronic flashing signs.

Collision Remedial Measures

Castlerock Road/Kings Road, Coleraine - It is proposed to upgrade and renew the signs and lines at the mini-roundabout junction. Work now complete.

Portstewart Road/Glenmanus Road, Portrush - It is proposed to upgrade and renew the signs and lines at the mini-roundabout junction. Work now complete.

Transportation - Pedestrian Measures

Lodge Road Roundabout, Coleraine – It is proposed to standardise the pedestrian crossings around the roundabout to Toucans which will facilitate cyclists.

A2 Bann Bridge at Hanover Place, Coleraine – To facilitate cyclists it is proposed to upgrade the pedestrian crossings between the existing Cycle Footway Bridge and Hanover Place to Toucan crossings.

Proposed Traffic Schemes 2021/22 (continued)

A26 Dunhill Road Dual Carriageway – It is proposed to upgrade the existing Pelican crossing to a Puffin crossing.

Lever Road at Medical Centre and Convention Car Park, Portstewart - It is proposed to provide drop kerbs to improve pedestrian crossing facilities.

Whitehill Park, Limavady – It is proposed to provide drop kerbs to improve pedestrian crossing facilities.

Shanreagh Park, Limavady – It is proposed to provide drop kerbs to improve pedestrian crossing facilities.

Ballyquin Road near Derryork, Limavady – To facilitate pedestrians it is proposed to provide a bus hardstand at the existing bus stop.

Minor Traffic Management Measures

Quay Road, Ballycastle - To assist traffic progression, it is proposed to extend the waiting restrictions along the Quay Road.

Main Street, Ballymoney – It is proposed to review the provision of loading bays and increase the number of available parking spaces on Main Street.

Moneydig Speed Limit – To assist in improving road safety, it is proposed to introduce a 40mph speed limit along a stretch of the Moneydig Road and a 30mph speed limit within Moneydig Park.

Craigahulliar Road/Ballymacrea Road – Upgrade warning signs and road markings.

B147 Kirk Road/Boyland Road Ballymoney – Upgrade warning signs and road markings.

Safe Routes to School

Part-time 20mph Speed Limits at Schools

Infrastructure Minister, Nichola Mallon announced that it is her intention to take forward further tranches of part-time 20mph speed limits at schools. All schools in the Causeway Coast and Glens area will be assessed and prioritised for inclusion in the 2021/22 programme, the nature and extent of which is being finalised within the budget available.

3.3 Street Lighting

Street Lighting Schemes 2020/21

The total number of lights in the Council area is now 25,639. The Minister has confirmed funding this year to ensure a full 12 month repair service can be provided. As part of the Department's continued invest to save initiative, it is proposed to retrofit 4000 old sodium lanterns with more cost effective LEDs throughout the borough.

We would encourage public representatives to let us know about any street lighting defects online at <http://www.nidirect.gov.uk/street-lighting-and-reporting-a-fault>.

Completed Street Lighting Schemes 2020/21

Location	Number of lights	Scheme Type
Strand Road, Coleraine	23	New Scheme
Ballintrae Park, Portballintrae	20	New Scheme
Mountainview Park, Dungiven	16	New Scheme
Whitehill Park, Limavady, Phase 1	24	New Scheme
The Meadows, Ballymoney	14	New Scheme
Tullaghans Road, Dunloy, Phase 2	11	New Scheme
Whitehill Park, Limavady, Phase 2	25	New Scheme
Holmlea Park, Dungiven	6	New Scheme
Limavady Road, Garvagh, Phase 2	6	New Scheme
Taylor Park, Limavady	6	New Scheme
Nursery Avenue, Coleraine	6	New Scheme
Curraghmore Road/Park, Glenuillin	12	New Scheme
Castlerock Road, Coleraine	14	New Scheme
Lisnagrot Road, Kilrea	6	New Scheme
Kirk Road, Ballymoney	40	New Scheme

Completed Street Lighting Schemes 2020/21 (continued)

Location	Number of lights	Scheme Type
Mitchel Park, Dungiven	10	New Scheme
Whitehill Park, Limavady, Phase 3	24	New Scheme
Knocklayde Park, Ballymoney	9	New Scheme
Charlotte Street, Ballymoney	13	New Scheme
Oakfield Place, Ballymoney	5	New Scheme
Norwood Court, Coleraine	15	New Scheme
Seacon Road, Ballymoney	11	New Scheme
Iveagh Park, Greysteel	4	New Scheme
Westland Crescent, Greysteel	6	New Scheme
Gortgare Road and Avenue, Greysteel	13	New Scheme
Briar Hill and Briar Hill Gdns, Greysteel	18	New Scheme
Oughtymoyle, Bellarena	20	New Scheme
Ballycastle Road, Coleraine	40	New Scheme
Fogarty Crescent, Ballycastle	11	New Scheme
Gortaclee Road, Cushendall	11	New Scheme
Middlepark Ave, Cushendall	12	New Scheme
Middlepark Road, Cushendall	28	New Scheme
Ardmoyle Park, Cushendall	14	New Scheme
Moyle View, Cushendall	6	New Scheme
Blackrock Road, Ballyvoey	9	New Scheme
Kingsbury Gardens, Coleraine	31	New Scheme
Newmills Road Lower, Coleraine	16	New Scheme

Completed Street lighting Schemes 2020/21 (continued)

Location	Number of lights	Scheme Type
Ballylintagh Crescent, Ballylintagh	5	New Scheme
Ballycormick Park, Ballymoney	12	New Scheme
Greenmount Avenue, Coleraine	32	New Scheme

Total number of lights installed 604

Coleraine	831	LED Retrofit
Moyle	458	LED Retrofit
Ballymoney	741	LED Retrofit
Limavady	661	LED Retrofit

Total number of lights installed 2691

Proposed Street Lighting Schemes 2021/22

Location	Number of Lights	Scheme Type
Cedar Drive, Ballycastle	3	New Scheme
Portrush Rd RAB, Ballymoney	12	New Scheme
Kirk Rd junction, Ballymoney By Pass	13	New Scheme
Ballymena Rd junction, Ballymoney By Pass	10	New Scheme
Knock Rd junction, Ballymoney By Pass	8	New Scheme
Priestland Road, Ballytober	10	New Scheme
Gateside Road, Gateside, Coleraine	14	New Scheme
Stuart Park, Ballymoney	35	New Scheme
Brookvale, Bendooragh	5	New Scheme
Willowdale, Bendooragh	6	New Scheme
Millrace Terrace and Riveriew, Clintyfinnan	19	New Scheme
Circular Road, Coleraine	6	New Scheme
Millburn Road, Coleraine	25	New Scheme
Portrush Road, Coleraine	16	New Scheme
Artillery Road, Coleraine	10	New Scheme
Curragh Road, Dungiven	7	New Scheme
Meadowvale Park, Limavady, Phase 1	40	New Scheme
Ballycairn Road, Coleraine	16	New Scheme
Priory Road, Dungiven	26	New Scheme
Ard Na Smoll, Dungiven	23	New Scheme
Ballymena Road, Ballymoney	26	New Scheme
Fairhead View, Ballycastle	22	New Scheme

Proposed Street Lighting Schemes 2021/2022 (continued)

Location	Number of lights	Scheme Type
Whitepark Road, Ballintoy	23	New Scheme
Coleraine Road, Garvagh	17	New Scheme
Bridge Street/Bann Road, Kilrea	20	New Scheme
Carthall Park, Coleraine	11	New Scheme
Gortgranagh Drive, Coleraine	6	New Scheme
Knocklayde Park, Coleraine	11	New Scheme
Altmore Park, Coleraine	3	New Scheme
Tulleybeg Avenue, Coleraine	9	New Scheme
Princess Gardens, Coleraine	4	New Scheme
Kurin Road, Garvagh	14	New Scheme
Rock View Park, Rasharkin	10	New Scheme
Carness Drive, Dunloy	15	New Scheme
Braeside Park, Dunloy	14	New Scheme
Fairfield Road Area, Portstewart	34	New Scheme
St. Johns Close Area, Portstewart	38	New Scheme

Total number of lights proposed to be installed 581

SECTION 4

NETWORK PLANNING & HIGHWAY STRUCTURES

Network Planning and Highway Structures Manager: Cathal Brown

Supported by



Andrew Gillan

Development Control, Private Streets and Area Plans
County Hall
Castlerock Road
Coleraine
BT51 3HS
E-mail: Andrew.Gillen@infrastructure-ni.gov.uk



Frank Wright

Highway Structures
County Hall
Castlerock Road
Coleraine
BT51 3HS
E-mail: Frank.Wright@infrastructure-ni.gov.uk

4.1 Development Control

Planning Applications 2020/21

The Council forwards planning applications to the Development Control Section of the Department for scrutiny of the roads issues, including access arrangements, parking standards and provision, and road layout and geometry. The road widths, radii, gradients, drainage and other construction data are checked against departmental standards. Development Control also checks the visibility splays and forward sight distances at the vehicle access points.

The Private Streets Order 1980 is applied if the street is to become public and maintained by the Department. The Development Control Section determines the area to be adopted, calculates the bond amount, arranges the supervision of the construction of the private street and, following satisfactory completion of the streets by the developer, and arranges for adoption into the public road network. In certain circumstances, the Department can take enforcement action to ensure completion of the street.

Other work includes Property Enquiries, Planning Appeals and the approval of road access works under the terms of the Roads (Northern Ireland) Order 1993.

During the period 1 April 2020 to 31 March 2021 Development Control Section dealt with:-

Planning Applications	1329
Pre-Planning Enquiries	46
Planning Applications involving Private Streets Order	10

Adoptions 2020/21

The Department adopted 436 metres of carriageway and 360 metres of footway. Developments adopted during this period are listed below:-

Development	Carriageway (m)	Footway (m)	Date
off Kilraughts Road, Ballymoney	142	88	30/07/2020
off Novally Road, Ballycastle	-	272	06/08/2020
Strandview Cottages, Castlerock	294	-	24/11/2020

4.2 Maintenance of Structures

Completed Maintenance of Structures 2020/21

Structures Section manages the 1,364 bridges and culverts with a span of 1.8m and greater within the Division, there are 683 of these structures in the Causeway Coast & Glens area. Smaller structures are managed by the local Section Office.

Route No.	Name	Description	Cost
C84	Low Town Bridge, Armoy	Repair scoured invert and remove vegetation	£3,600
U4088	Corkey South Bridge, Corkey	Repair damaged wingwalls	£700
C81	Glens Bridge, Armoy	Repair damaged parapet	£4,000
A2	Knocknacrow bridge, Cushendun	Reconstruct parapet	£1,800
B94	Cloughmills Bridge, Cloughmills	Repair parapets, replace missing fencing	£1,000
C87	Killagan Bridge, Dunloy	Repair damaged parapet	£2,100
A2	Glenariff Bridge, Waterfoot	Repair damaged parapet	£1,250
C93	Ballyrashane Bridge, Coleraine	Reconstruct upstream parapet	£1,100
C107	Coolwood Bridge, Ballycastle	Repair damaged parapet	£650

Completed Maintenance of Structures 2020/21 (continued)

Route No.	Name	Description	Cost
C106	Pollans Bridge, Cushendall	Reconstruct parapet	£2,700
U3339	MacCleary's Bridge, Coleraine	Remove tree, repair cracks in arch barrels and de-silt	£11,000
C523	Turmeel 2 Bridge, Dungiven	(Phase 1) Repair damaged parapet and undermined abutment	£6,400
C82	Tornamoney Bridge, Cushendun	Repair damaged parapet and remove vegetation	£13,500
U5110	Glassmullan Bridge, Waterfoot	Remove vegetation, repair scoured invert and damaged wingwalls. Reconstruct parapets.	£5,300
A2	Glenariffe Bridge, Waterfoot	Repair damaged parapet	£1,300
A43	Boyd's Bridge, Cargan	Remove large tree and repair parapet	£5,800
C533	Sconce Bridge, Articlave	Reconstruct parapets	£5,000
C89	Dirraw Bridge, Ballymoney	Remove large tree from spandrel wall	£3,500
C523	Rallagh Bridge, Dungiven	Remove large tree limb and vegetation. Repoint as necessary	£5,000
C533	Ballywildrick Bridge, Ballywildrick	Repair damaged parapets	£3,300
B190	Moneyquiggy Bridge, Dungiven	Repair damaged arch and wingwall. Upgrade vehicle restraint system	£65,000
U3369	Ballyagan Bridge, Garvagh	(Phase 1) Reconstruct parapets and provide drainage	£10,000
U2229	Sistrakeel Bridge, Ballykelly	Remove tree and reconstruct parapet	£6,000

Completed Maintenance of Structures work at a cost of £143,800

Proposed Maintenance of Structures 2021/22

Route No.	Name	Description	Cost
B64	Kilrea Bridge, Kilrea	Waterproof bridge deck, paint metal section	£70,000
C84	Glebe Bridge, Armoy	Reconstruct parapet and wingwall	£48,000
U3339	MacCleary Bridge, Coleraine	(Phase 2) De-silt and de-veg arches, repoint as required	£8,000
U3369	Ballyagan Bridge, Garvagh	(Phase 2) De-silt arches	£10,000
B17	Magheracashel Bridge, Ballycastle	Repair scoured abutment	£10,000
U99	Knocknacarry Bridge, Cushendun	Remove vegetation, clear drainage outlets, repair scoured apron	£5,000
U5100	Clady Bridge, Cushendun	Reconstruct damaged parapet	£4,000
A2	Glebe Bridge, Ballykelly	Repair cracked arch soffit, repair undermined apron and washout at wingwall	£3,500
B96	Glebe Bridge, Rasharkin	Repair undermined abutment and upstream scour	£10,000
C529	Drumgavenny Bridge, Drumsurn	Repair damaged parapet	£1,000
B15	Drumahaman Bridge, Ballycastle	De-veg structure, repair washout damage to spandrel and cutwater	£7,000

Proposed Maintenance of Structures work at an estimated cost of £176,000

Completed Vehicle Restraint System Work 2020/21

Route No.	Name	Description	Cost
B190	Moneyquiggy Bridge, Dungiven	Upgrade vehicle restraint system	£30,000

Completed Vehicle Restraint Upgrade work at a cost of £30,000